

COPPER TUBING HANGERS



Fig. CT-121

Copper Tubing Riser Clamp

Size Range: 1/2" through 4"

Material: Carbon steel

Finish: Copper plated, also available in yellow dichromate.

Service: Recommended for support and steadying of copper tube risers, either insulated or non-insulated. This product is not intended for use with hanger rods.

Approvals: Complies with Federal Specification A-A-1192A (Type 8) WW-H-171-E (Type 8) and MSS-SP-69 (Type 8).

Service: For support and steadying of copper tubing risers.

Installation: Clamp is fitted and bolted preferably below a coupling or fitting on the tubing. Do not over tighten bolts.

Features: Rounded ears provide greater safety for personnel.

Ordering: Specify tube size, figure number, name.

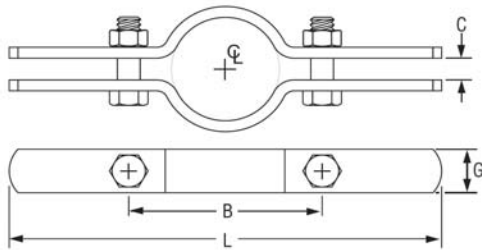


Fig. CT-121: Loads (lbs) • Weight (lbs) • Dimensions (in)

Tube Size	Max Load	Weight	L	Stock Width	Bolt Size
1/2	75	0.52	6 1/2	1	5/16
3/4		0.56	7		
1	120	0.94	9 3/8	1 1/4	3/8
1 1/4		0.98	9 5/8		
1 1/2		1.50	10		
2	300	1.50	10 3/8	1 1/2	1/2
2 1/2		1.70	11 13/16		
3		1.80	11 1/2		
3 1/2		1.90	12		
4		2.60	13		



International Seismic Application Technology
 14848 East Northam Street, La Mirada, CA 90638
 877-999-4728(Toll Free) 714-522-0845(Fax)
 www.isatsb.com

W V Jauger

Model Law Structural Engineer
 NCEES No.20675

Rev. 0
 11/1/06

Page
H5.21