


## PUMPING TEE

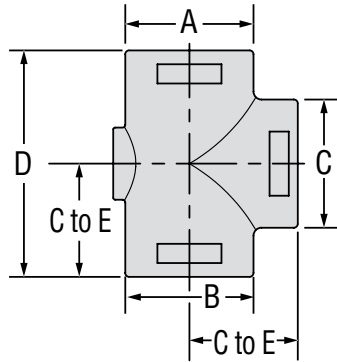

### Material Options

Ductile Iron per ASTM A395 Gr. 60-40-18

### Finish Options

- Rust Inhibiting Paint: RED (Standard)
- Scotchkote 134
- Corvel 1660
- Teflon available

PUMPING TEE														
Size	Working Pressure		OD A		OD B		OD C		Unit Weight					
	PSI	bar	in	mm	in	mm	in	mm						
in									lbs	kg				
2" 8RD EUE x 2" 8RD EUE x 2" 11½V REG	3,000	206.8	3⅝	92	3⅝	92	3	76	6	152	10.0	4.5		
2" 8RD EUE x 2" 11½V REG x 2" 11½V REG											10.0	4.5		
2" 11½V REG x 2" 11½V REG x 2" 11½V REG											11.0	5.0		
2½" 8RD EUE x 2½" 8RD EUE x 2" 11½V REG			4	102	4	102	4	102	3⅞	90	7⅞	179	13.0	5.9
2½" 8RD EUE x 2½" 8V LP x 2" 11½V REG													14.0	6.4
2½" 8RD EUE x 2" 8RD EUE x 2" 11½V REG													14.0	6.4
2½" 8RD EUE x 2½" 8RD EUE x 2½" 8V LP													13.0	5.9
2½" 8RD EUE x 2½" 8RD LP x 2½" 8V LP													13.0	5.9
2½" 8RD EUE x 2½" 8RD EUE x 3" 8V LP													22.0	10.0
2½" 8RD EUE x 3" 8V LP x 3" 8V LP			4¾	121	4¾	121	4½	114	4⅞	103	8⅞	206	20.0	9.1
3" 8RD EUE x 3" 8RD EUE x 3" 8V LP	18.0	8.2												

Last thread in each combination is the side outlet.  
All Pumping Tees have a 1" NPT bleeder port.

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			