GRUVLOK® FIRE-RITE™ SHORT PATTERN FITTINGS

c UL us LISTED FM APPROVED

For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

FIG. 7450

90° Short Pattern Elbow

The Gruvlok® Fire-Rite™ short pattern 90° elbows has a 2" to 8" size range and a 300 psi pressure rating.

Fire-Rite™ fittings are painted to industry specification and are available galvanized for more corrosive environments.

CAD design increases internal diameters and provides superior flow capability.



FIGURE 7450 90° ELBOW SHORT PATTERN FITTING – PRESSURE DROP

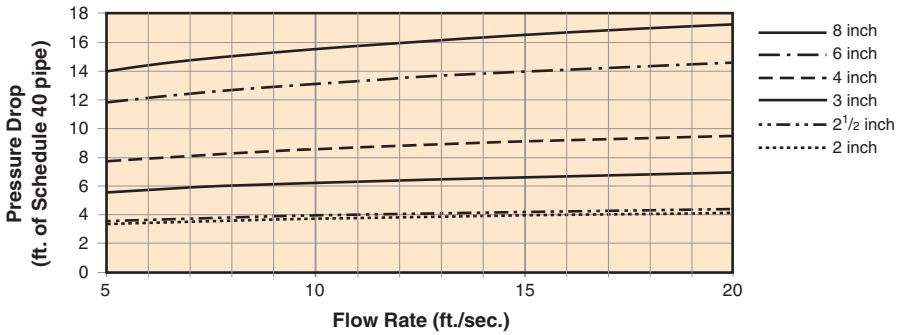

Gruvlok short pattern fittings exceed the headloss requirements of NFPA 13.

For Fig. 7450 90° grooved end elbows use the value shown.

Note: Above values are shown for Schedule 40 pipe to be consistent with industry practices.

FIGURE 7450 90° ELBOW

Nominal Size	O.D.	Center to End	Approx. Wt. Ea.
In./DN(mm)	*In./mm*	*In./mm*	*Lbs./Kg*
2 *50*	2.375 *60.3*	2¾ *70*	1.7 *0.8*
2½ *65*	2.875 *73.0*	3 *76*	2.6 *1.2*
3 *80*	3.500 *88.9*	3⅜ *86*	3.5 *1.6*
4 *100*	4.500 *114.3*	4 *102*	6.5 *3.0*
6 *150*	6.625 *168.3*	5½ *140*	14.8 *6.7*
8 *200*	8.625 *219.1*	6⅞ *175*	25.6 *11.6*

All are Ductile Iron.

PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ **Approved**
Address:	☐ **Approved as noted**
Contractor:	☐ **Not approved**
Engineer:	**Remarks:**
Submittal Date:	
Notes 1:	
Notes 2:	

FITTINGS FOR GROOVED-END PIPE

Gruvlok fittings are available through 24" nominal pipe size in a variety of styles. Use the Fitting Size Table to convert nominal pipe size to corresponding pipe O.D.

These fittings are designed to provide minimum pressure drop and uniform strength.

Depending on styles and size, Gruvlok fittings are provided in various materials including ductile iron, forged steel or fabricated steel.

Pressure ratings of Gruvlok standard fittings conform to those of Fig. 7001 Gruvlok coupling.

NSF/ANSI 61

Galvanized Gruvlok Fittings are NSF-61 and Low Lead Approved

LISTED APPROVED

For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

FLOW DATA – FRICTIONAL RESISTANCE (EXPRESSED AS EQUIVALENT STRAIGHT PIPE)

Nom. Size	O.D.	Pipe Wall Thickness	Elbow		Tee	
			90°	45°	Branch	Run
In./DN(mm)	In./mm	In./mm	Ft./m	Ft./m	Ft./m	Ft./m
1 25	1.315 33.4	0.133 3.4	1.7 0.5	0.9 0.3	4.4 1.3	1.7 0.5
1¼ 32	1.660 42.2	0.140 3.6	2.3 0.7	1.2 0.4	5.8 1.8	2.3 0.7
1½ 40	1.900 48.3	0.145 3.7	2.7 0.8	1.3 0.4	6.7 2.0	2.7 0.8
2 50	2.375 60.3	0.154 3.9	3.4 1.0	1.7 0.5	8.6 2.6	3.4 1.0
2½ 65	2.875 73.0	0.203 5.2	4.1 1.2	2.1 0.6	10.3 3.1	4.1 1.2
3 O.D. 76.1	2.996 76.1	0.197 5.0	4.3 1.3	2.2 0.7	10.8 3.3	4.3 1.3
3 80	3.500 88.9	0.216 5.5	5.1 1.6	2.6 0.8	12.8 3.9	5.1 1.6
4¼ O.D. 108.0	4.250 108.0	0.220 5.6	6.4 2.0	3.2 1.0	16.1 4.9	6.4 2.0
4 100	4.500 114.3	0.237 6.0	6.7 2.0	3.4 1.0	16.8 5.1	6.7 2.0
5¼ O.D. 133.0	5.236 133.0	0.248 6.3	8.0 2.4	4.0 1.2	20.1 6.1	8.0 2.4
5½ O.D. 139.7	5.500 139.7	0.248 6.3	8.3 2.5	4.2 1.3	20.9 6.4	8.3 2.5
5 125	5.563 141.3	0.258 6.6	8.4 2.6	4.2 1.3	21.0 6.4	8.4 2.6
6¼ O.D. 159.0	6.259 159.0	0.280 7.1	9.7 3.0	4.9 1.5	24.3 7.4	9.7 3.0
6½ O.D. 165.1	6.500 165.1	0.280 7.1	10.0 3.0	5.0 1.5	24.9 7.6	10.0 3.0
6 150	6.625 168.3	0.280 7.1	10.1 3.1	5.1 1.6	25.3 7.7	10.1 3.1
8 200	8.625 219.1	0.322 8.2	13.3 4.1	6.7 2.0	33.3 10.1	13.3 4.1
10 250	10.750 273.1	0.365 9.3	16.7 5.1	8.4 2.6	41.8 12.7	16.7 5.1
12 300	12.750 323.9	0.375 9.5	20.0 6.1	10.0 3.0	50.0 15.2	20.0 6.1
14 350	14.000 355.6	0.375 9.5	22.2 6.8	17.7 5.4	64.2 19.6	22.9 7.0
16 400	16.000 406.4	0.375 9.5	25.5 7.8	20.4 6.2	73.9 22.5	26.4 8.0
18 450	18.000 457.2	0.375 9.5	28.9 8.8	23.1 7.0	87.2 26.6	31.1 9.5
20 500	20.000 508.0	0.375 9.5	32.2 9.8	25.7 7.8	97.3 29.7	34.8 10.6
24 600	24.000 609.6	0.375 9.5	38.9 11.9	31.1 9.5	113.0 34.4	40.4 12.3

For the reducing tee and branches, use the value that is corresponding to the branch size. For example: for 6" x 6" x 3" tee, the branch value of 3" is 12.8 ft (3.9).

MATERIAL SPECIFICATIONS

CAST FITTINGS:

Ductile iron conforming to ASTM A 536, Grade 65-45-12
Malleable iron conforming to ASTM A 47

FABRICATED FITTINGS:

1-12" Carbon steel, Schedule 40, conforming to ASTM A 53, Grade B
14-24" Carbon steel, 0.375 wall, conforming to ASTM A 53, Grade B

COATINGS:

Rust inhibiting paint – Color: ORANGE (standard)
Hot Dipped Zinc Galvanized conforming to ASTM A 153 (optional)
Other Colors Available (IE: RAL3000 and RAL9000)

FITTING SIZE

Nominal Size	O.D.	Nominal Size	O.D.
In./DN(mm)	In./mm	In./DN(mm)	In./mm
1 25	1.315 33.4	5 140	5.563 141.3
1¼ 32	1.660 42.4	6¼ O.D. 159.0	6.259 159.0
1½ 40	1.900 48.3	6½ O.D. 165.1	6.500 165.1
2 50	2.375 60.3	6 150	6.625 168.3
2½ 65	2.875 73.0	8 200	8.625 219.1
3 O.D. 76.1	2.996 76.1	10 250	10.750 273.0
3 80	3.500 88.9	12 300	12.750 323.9
3½ 90	4.000 101.6	14 350	14.000 355.6
4¼ O.D. 108.0	4.250 108.0	16 400	16.000 406.4
4 100	4.500 114.3	18 450	18.000 457.2
5¼ O.D. 133.0	5.236 133.0	20 500	20.000 508.0
5½ O.D. 139.7	5.500 139.7	24 600	24.000 609.6

The Fitting Size Chart is used to determine the O.D. of the pipe that the fittings is to be used with. Gruvlok Fittings are identified by either the Nominal size in inches or the Pipe O.D. in/mm.