

FIG. 7060S* Standard Tee for Fire Protection

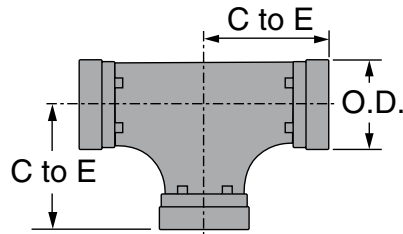


FIGURE 7060S* STANDARD TEE

Nominal Size	O.D.	Max. Rated Pressure	Center to End	Approx. Wt. Ea.
In./DN(mm)	In./mm	PSI/bar	In./mm	Lbs./Kg
1 25	1.315 33.4	300 20.7	2¼ 57	0.9 0.4
1¼ 32	1.660 42.2	300 20.7	2¾ 70	1.5 0.7
1½ 40	1.900 48.3	300 20.7	2¾ 70	1.8 0.8
2 50	2.375 60.3	300 20.7	3¼ 83	2.4 1.1
2½ 65	2.875 73.0	300 20.7	3¾ 95	4.0 1.8
3 O.D. 76.1	2.996 76.1	300 20.7	4 101	4.6 2.1
3 80	3.500 88.9	300 20.7	4¼ 108	5.8 2.6
4 100	4.500 114.3	300 20.7	5 127	10.3 4.7
5½ O.D. 139.7	5.500 139.7	300 20.7	5½ 140	16.1 7.3
5 125	5.563 141.3	300 20.7	5½ 140	16.2 7.3
6½ O.D. 165.1	6.500 165.1	300 20.7	6½ 165	24.4 11.1
6 150	6.625 168.3	300 20.7	6½ 165	25.7 11.7
8 200	8.625 219.1	300 20.7	7¾ 197	41.1 18.6
10 250	10.750 273.1	300 20.7	9 229	74.5 33.8
12 300	12.750 323.9	300 20.7	10 254	94.7 43.0

Additional sizes available, see Gruvlok Catalog or contact an Anvil Representative.

These fittings are designed to provide minimal pressure drop and uniform strength.



For Listings/Approval Details and Limitations, visit our website at www.anvilint.com or contact an Anvil® Sales Representative.

- Available galvanized.

* When ordering, refer to product as FP7060S.

MATERIAL SPECIFICATIONS

CAST FITTINGS:

Ductile Iron conforming to ASTM A-536

COATINGS:

- Rust inhibiting paint Color: ORANGE (standard) or
- Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)
- Other available options: Example: RAL3000 or RAL9000 Series

PROJECT INFORMATION

APPROVAL STAMP

Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	