

FIG. 7062 Bullhead Tee

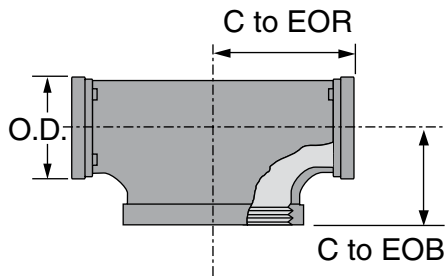


FIGURE 7062 BULLHEAD TEE (GR x GR x FPT)

Nominal Size	O.D.	Max. Rated Pressure	Center to End of Run	Center to End of Branch	Approx. Wt. Ea.
In./DN(mm)	In./mm	PSI/bar	In./mm	In./mm	Lbs./Kg
5 x 5 x 8 125 x 125 x 200	5.563 141.3	300 20.7	7¾ 197	5½ 140	31.0 14.1
6 x 6 x 8 150 x 150 x 200	6.625 168.3	300 20.7	7¾ 197	6½ 165	37.6 17.1

These fittings are designed to provide minimal pressure drop and uniform strength.



For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

 - Available galvanized.

MATERIAL SPECIFICATIONS

FABRICATED FITTINGS:

Carbon Steel, Schedule 40, conforming to ASTM A-53, Grade B

COATINGS:

- Rust inhibiting paint Color: ORANGE (standard) or
- Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)
- Other available options: Example: RAL3000 or RAL9000 Series

PROJECT INFORMATION		APPROVAL STAMP
Project:		<input type="checkbox"/> Approved
Address:		<input type="checkbox"/> Approved as noted
Contractor:		<input type="checkbox"/> Not approved
Engineer:		Remarks:
Submittal Date:		
Notes 1:		
Notes 2:		