



FIG. 7065 Standpipe Tee

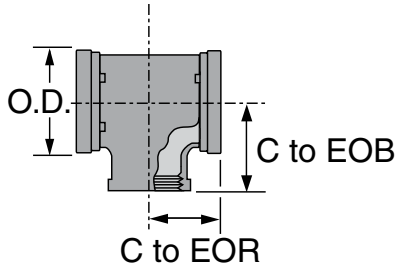

These fittings are designed to provide minimal pressure drop and uniform strength.



For Listings/Approval Details and Limitations, visit our website at www.anvilintl.com or contact an Anvil® Sales Representative.

 - Available galvanized.

FIGURE 7065 STANDPIPE TEE (GR x GR x FPT)

Nominal Size	O.D.	Max. Rated Pressure	Center to End of Run	Center to End of Branch	Approx. Wt. Ea.
In./DN(mm)	In./mm	PSI/bar	In./mm	In./mm	Lbs./Kg
4 x 4 x 2½ 100 x 100 x 65	4.500 114.3	300 20.7	¾ 83	4 102	7.6 3.4
6 x 6 x 2½ 150 x 150 x 65	6.625 168.3	300 20.7	¾ 83	5⅞ 130	11.2 5.1

MATERIAL SPECIFICATIONS

FABRICATED FITTINGS:

Carbon Steel, Schedule 40, conforming to ASTM A-53, Grade B

COATINGS:

- Rust inhibiting paint Color: ORANGE (standard) or
- Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)
- Other available options: Example: RAL3000 or RAL9000 Series

PROJECT INFORMATION

APPROVAL STAMP

Project:	<input type="checkbox"/> Approved
Address:	<input type="checkbox"/> Approved as noted
Contractor:	<input type="checkbox"/> Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	