


FIG. SE-1 Short Pattern 90° Elbow



SE-1 are short pattern products and are specifically designed for use in Fire Protection applications where economy is a factor. All products are UL/ULC Listed, LPCB, VdS and FM Approved.

Maximum working pressure for these products is 300 PSI. For the latest UL/ULC listed, LPCB, VdS and FM Approved pressure ratings versus pipe schedule, see www.anvilintl.com or contact your local Anvil Representative.



SE-1 90° ELBOW			
Nominal Size	O.D.	Center to End	Approx. Wt. Ea.
In./DN(mm)	In./mm	In./mm	Lbs./Kg
2 50	2.375 60.3	2¾ 70	1.5 0.7
2½ 65	2.875 73.0	3 76	2.1 1.0
3 80	3.500 88.9	3¾ 86	3.6 1.6
4 100	4.500 114.3	4 102	5.8 2.6
6 150	6.625 168.3	5½ 140	11.8 5.3
8 200	8.625 219.1	6¾ 175	21.1 9.6

Additional sizes available, contact an Anvil Representative.

MATERIAL SPECIFICATIONS


CAST FITTINGS:

Ductile Iron conforming to ASTM A-536, Grade 65-45-12

COATINGS:

- Rust inhibiting paint Color: ORANGE (standard) or
- Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)
- Other available options: Example: RAL3000 or RAL9000 Series

SE-1 90° ELBOW SHORT PATTERN FITTING - PRESSURE DROP

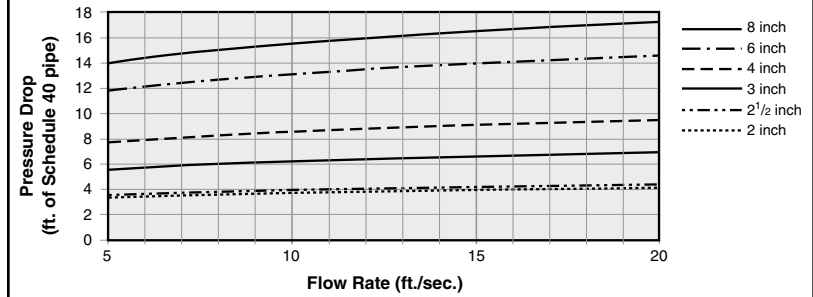

SPF™ short pattern fittings exceed the headloss requirements of NFPA 13.

For Fig. SE-1 90° grooved end elbows use the value shown.

Note: Above values are shown for Schedule 40 pipe to be consistent with industry practices.

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			