


Turnbuckle Adjuster Fig. 114

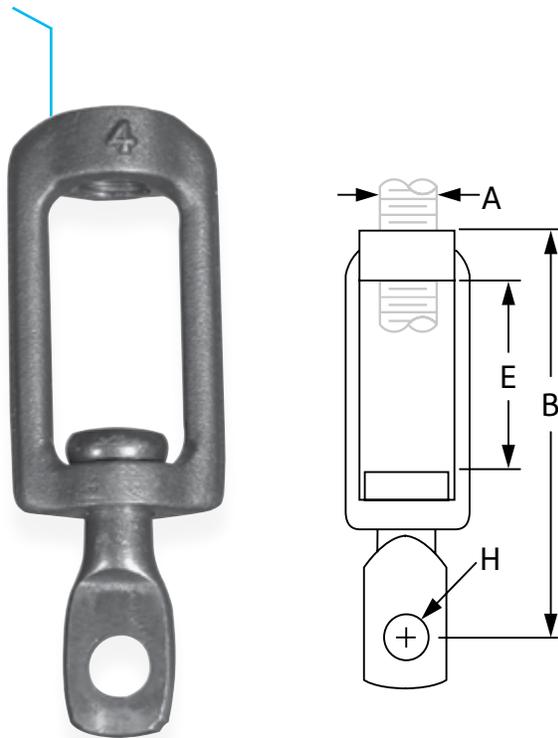

Size Range: ¼" through ¾"

Material: Malleable Iron

Finish: Plain

Installation: Normally used with split pipe ring, Fig. 108, see page 30.

Approvals: Complies with Federal Specification A-A-1192A (Type 15), WW-H-171-E (Type 15), ANSI/MSS SP-69 and MSS SP-58 (Type 15).

Maximum Temperature: 450° F

Features:

- An economical and simple means of obtaining vertical adjustment and flexibility at the pipe connection.
- Permits adjustment after pipe is in place.

Ordering: Specify rod size, figure number and name.

Fig. 114: Dimensions (in) • Loads (lbs) • Weight (lbs)

Rod Size A	Max Load	Weight	B	E	H
¼	230	0.09	2½	¼	⅞
⅜		0.28		⅞	⅓
½	730	0.31	3⅞	1⅓	⅓
⅝		0.72		2⅝	½
¾	860	0.70	4⅞		⅝



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	