

Double Offset Hanger and Restrainer

Fig. 184 (Formerly Afcon Fig. 515)

Size Range: 3/4" through 1"

Material: Carbon Steel

Finish: Pre-Galvanized per ASTM A653

Service:

- Hanger and surge restraint for horizontal CPVC piping when installed on the side of the supporting structure.
- Listed with hardware provided on structural wood beams and composite wood beams (1" minimum). For wood structures with less than 1" thickness, wood blocks may be placed on the backside of the wood structure. #14x1" fastener provided must be fully engaged in the wood block.
- May be installed with concrete, steel, and other structural members with fasteners which comply with the requirements of NFPA 13.

Approvals: cULus Listed

Installation:

- Slide CPVC pipe through the double offset hanger and restrainer.
- Secure the hanger to the supporting structure with the screws provided or with listed fasteners.

Features:

- Beveled edge design helps protect the CPVC pipe from any rough surface and eliminates pipe abrasion.
- Easily attaches to wood structure with #14 x 1" hex washer head self-threading screw supplied with product. No pre-drilling required.
- Bottom of pipe is offset 1/2" from the structure. Eliminates wooden spacer blocks.

Ordering: Specify CPVC pipe size, figure number and description.

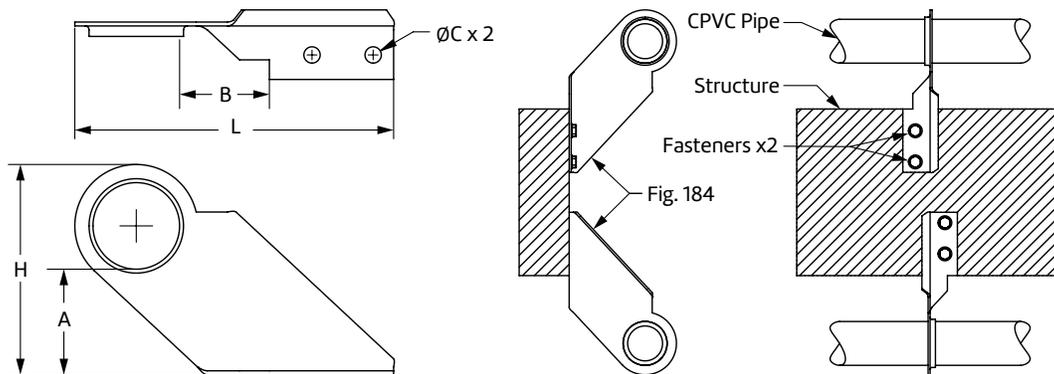


Fig. 184: Dimensions (in) • Weight (lbs)

CPVC Pipe Size	A	B	ØC	H	L	Max. Hanger Spacing (ft)	Approx. Weight/100
3/4	1 1/2	1 1/2	1/4	3/8	5/8	5 1/2	17
1	1 1/2	1 1/2	1/4	3/8	5/8	6	17

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	