


Light Duty Adjustable Clevis Fig. 65

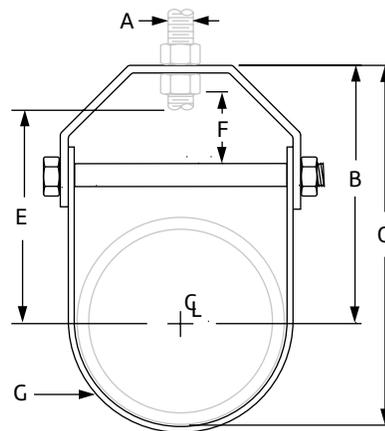

Size Range: ½" through 4"

Material: Carbon steel

Finish: Plain or Zinc Plated
(Hot-Dip Galvanized optional)

Service: Recommended for suspension of stationary pipe or conduit.

Maximum Temperature:
Plain 650° F, Galvanized and Epoxy 450° F

Approvals: Complies with Federal Specification WW-H-171-E (Type 12).

Installation: Hanger load nut above the clevis must be tightened securely to assure proper hanger performance.

Adjustment: Vertical adjustment is provided, varying with the size of clevis. Tighten upper nut after adjustment.

Features: An economical attachment for light duty service.

Ordering: Specify pipe size, figure number, name and finish.

Metric nut available upon request.

Caution: When an oversize clevis is used, a pipe spacer or multispace should be placed over clevis bolt to ensure that the lower U-strap will not move in on the bolt.

Fig. 65: Dimensions (in) • Loads (lbs) • Weight (lbs)

Pipe Size	Max Load	Weight	Rod Size A	B	C	Rod Take Out E	Adjustment F	G Width Lower
½	150	0.10	¾	1 ¹¹ / ₁₆	2 ³ / ₃₂	1 ¹ / ₄	7 ¹ / ₁₆	5 ⁵ / ₈
¾		0.17		1 ⁷ / ₈	2 ¹³ / ₃₂	1 ⁷ / ₁₆	½	
1		0.18		2 ⁵ / ₃₂	2 ¹³ / ₁₆	1 ¹¹ / ₁₆	5 ⁵ / ₈	
1¼	250	0.21		2 ¹⁷ / ₃₂	3 ³ / ₈	2 ¹ / ₁₆	1 ³ / ₁₆	
1½		0.24		2 ¹³ / ₁₆	3 ¹³ / ₁₆	2 ³ / ₈	1 ⁵ / ₁₆	
2		0.26		3 ¹¹ / ₃₂	4 ¹⁷ / ₃₂	2 ⁷ / ₈	1 ³ / ₁₆	¾
2½		0.50		3 ²⁷ / ₃₂	5 ⁹ / ₃₂	3 ¹ / ₄	1 ⁵ / ₁₆	
3	350	0.59		4 ¹⁵ / ₃₂	6 ⁷ / ₃₂	3 ⁷ / ₈	1 ⁵ / ₈	
3½		0.62		4 ³¹ / ₃₂	6 ³¹ / ₃₂	4 ³ / ₈	1 ⁷ / ₈	
4	400	0.77		5 ¹⁷ / ₃₂	7 ²⁵ / ₃₂	4 ¹⁵ / ₁₆	2 ¹ / ₈	

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	