
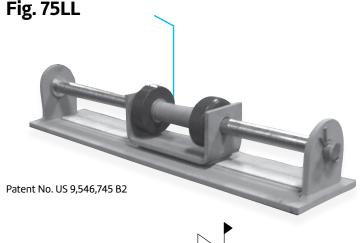


Longitudinal & Lateral Roller **Fig. 75LL** 



## **Description:**

This product is a special design per customer requirements. For all pipe sizes and longitudinal and lateral movements. Available in plain, galvanized and resilient finish including non-conductive coating. Non-standard pipe size and higher rated loads are available upon request.






Fig	. 75LL: Dimensions	(in) • Loads (lbs)

		•				
Pipe Size	Max Load	PL	W	Н	L	Recommended Pipe Keeper Size
6	1600	4	4	<b>7</b> <sup>5</sup> / <sub>8</sub>		C4 x 5.4
8			4	83/4	_	C4 x 5.4
10	2500	6	4.5	10³/16	PL plus	C6 x 10.5
12			4.5	115/16	Lateral Movement	C6 x 10.5
14	3600	8	5	1213/16	plus 1.75"	C8 x 11.5
16				14	_	C8 x 11.5
18				15¹/ <sub>8</sub>		C8 x 11.5
20	5900	10		1715/16	DI alua	C10 x 15.3
24			6	205/16	– PL plus – Lateral	C10 x 15.3
30	12.600	12	7	23³/₄	Movement	C12 x 20.7
36	13,600		/	2615/16	– plus 2.00" –	C12 x 20.7

Lateral movement specified by end user or analysis.

PROJECT INFORMATION	APPROVAL STAMP	
Project:	Approved	
Address:	Approved as noted	
Contractor:	Not approved	
Engineer:	Remarks:	
Submittal Date:		
Notes 1:		
Notes 2:		