


1/2" Conduit Connector Fitting Assembly Figs. AS 2560, AS 2561

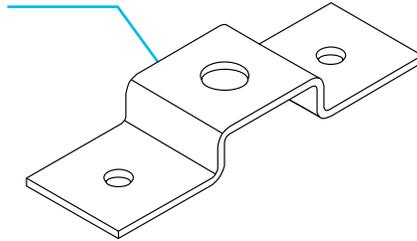


Description

Anvil-Strut Miscellaneous Fittings are designed to fit with all Anvil-Strut 1⁵/₈" wide channels. Unless otherwise noted, Anvil-Strut Miscellaneous Fittings are manufactured from 1/4" thick carbon steel, 1⁵/₈" wide, all holes are 9/16" diameter, spaced 1⁷/₈" on center and 1³/₁₆" from the end.

Conduit Connector Fitting Assembly

AS 2560 EG, 2561, EG

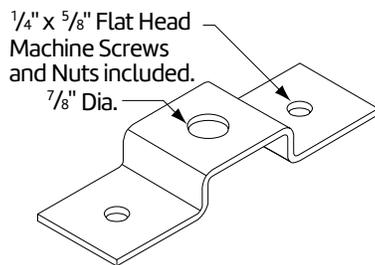

Catalog No.	Use With	Std. Pkg.	Wt./100 Pcs.
AS 2560	1/2" Conduit	50	36
AS 2561	3/4" Conduit	25	36

Std Pkg & Wt/100 pcs: See chart above.

Page notes unless otherwise specified: 1/4" thick, 1⁵/₈" wide, holes 9/16" diameter, spaced 1⁷/₈" on center and 1³/₁₆" from end.

LEGEND:

GR: Powder Coated Supr-Green **EG:** Electro-Galvanized **PG:** Pre-Galvanized **AL:** Aluminum
HG: Hot Dipped Galvanized **PL:** Plain **SS:** Stainless Steel **ZTC:** Zinc Trivalent Chromium
 Stainless Steel (**SS**), Zinc Trivalent Chromium (**ZTC**) and Hot Dipped Galvanized (**HG**) are specialty finishes.
 Pricing is located in the Specialty Strut Section of the Anvil-Strut price book.



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	